

SOLID COLOR

EPOXY AND POLYUREA SYSTEMS

*COST-EFFECTIVE
USER-FRIENDLY SOLUTIONS
ENDURE HEAVY USE IN
COMMERCIAL ENVIRONMENTS.*



SOLID COLOR EPOXY



SOLID COLOR POLYUREA



*DEVELOPED
BY CONTRACTORS,
FOR CONTRACTORS*


POLYUREA SHOP FLOOR

SOLID COLOR EPOXY SYSTEM

STRONG AND DEPENDABLE

The cost-effective and user-friendly solution designed for heavy use in commercial applications.

Penntek's Solid Color Epoxy System is built for the toughest applications. This system withstands high impact environments, providing chemical and abrasion resistance. It also has the option to be applied as a high build product to cover small imperfections. The product is pre-tinted to ensure a consistent color match every time. The solid color epoxy system offers a wide spectrum of textures and colors, with full custom color matching available. This system is the perfect choice for large projects, and with long open times you can apply a lot of square footage at once.

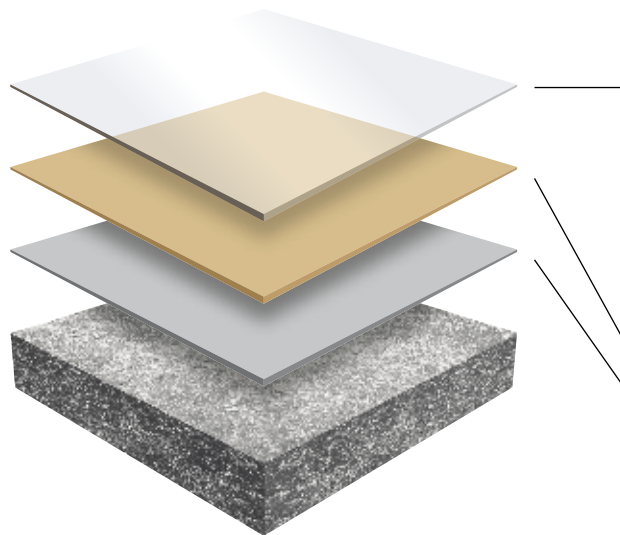

HOW IT'S MADE

Topcoat (2 Options):

- SC 150 - Single Comp UV stable high gloss high performance topcoat (Use A/O for added abrasion or Matte finish)
- UR 4500 - Aliphatic Urethane Topcoat (optional A/O for matte finish)

E 2000 - 100% Solids- High Build Epoxy Color Coat

SC 50 - Single Comp Primer for reduced gassing and pinholes (optional)



ADVANTAGES

- > Self-Leveling
- > High Build
- > Low Odor
- > Pre-Tinted
- > Cost Effective
- > Reduced Outgassing
- > 100% Solids
- > Long Recoat Window
- > Chemical Resistant
- > Abrasion Resistant
- > Perfect for Large Areas

TYPICAL APPLICATIONS

- > Garage Floors
- > Service Areas
- > Show Rooms
- > Production Areas
- > Veterinary Clinics
- > Heavy Traffic Areas
- > Machine Shops
- > Warehouse Settings

PRE-TINTED


SOLID COLOR POLYUREA SYSTEM

PERFORMANCE AND DURABILITY

The one day, user-friendly solution: Engineered to outperform the competition.

Penntek's Solid Color Polyurea System is a high performance, dependable option. Designed for cold weather installations, this system remains flexible while standing up to repeated freeze and thaw cycles. Choose from a high gloss or matte finish to suit your customer's needs. This Solid Color Polyurea System offers a wide spectrum of textures and colors, with full custom color matching available.

This system can be installed in a single day, allowing minimal down time for clients. The UV stable topcoat can be either a matte or high gloss finish. A second clear coat will enhance the gloss and performance. Penntek's Solid Color Polyurea System is very easy to maintain and designed to hold up to harsh conditions and extensive use.

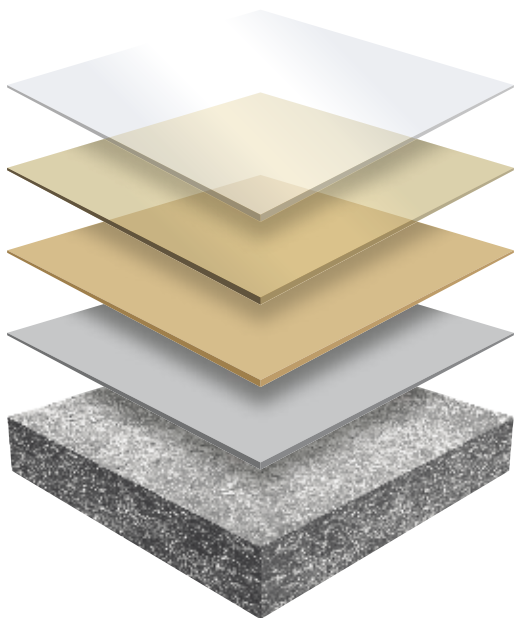

HOW IT'S MADE

- SC 150 - Single Comp UV Stable High performance Clear Coat (Optional Clear Coat)
- SC 75 - Single Comp UV Stable High performance Topcoat (Use A/O for added abrasion or Matte finish)
- PB 200 - Polyurea Basecoat (Used as Color Coat)
- SC 50 - Single Comp Primer for reduced outgassing and pinholes (Optional)



ADVANTAGES

- > Pre-Tinted
- > Fast Cure Times
- > 100% Solid Options
- > Long Recoat Window
- > Reduced Outgassing
- > UV Stable
- > Chemical Resistant
- > Flexible
- > Abrasion Resistant
- > Optional Slip Resistance
- > Choice of Cure Rates

TYPICAL APPLICATIONS

- > Garage Floors
- > Service Areas
- > Show Rooms
- > Production Areas
- > Veterinary Clinics
- > Heavy Traffic Areas
- > Machine Shops
- > Warehouse Settings

ONE DAY INSTALLATION


POLYUREA SHOP FLOOR SYSTEM

SAFETY AND DURABILITY

The affordable and user-friendly solution – provides a durable, non-slip surface.

Penntek's Shop Floor System offers extreme durability and chemical resistance at an economical price. The combination of the PB 200, dry sand, and a high chemical resistance PT 300 topcoat makes this unique system a true one-of-a-kind coating option.

With easy to use products and rapid cure times, this system is very user friendly and can be completed in a fraction of the time compared to other systems on the market today. With custom tinted topcoats and the added durability of dry sand, Penntek's Shop Floor System is truly unique to every job and will leave a uniform non-slip texture every time.

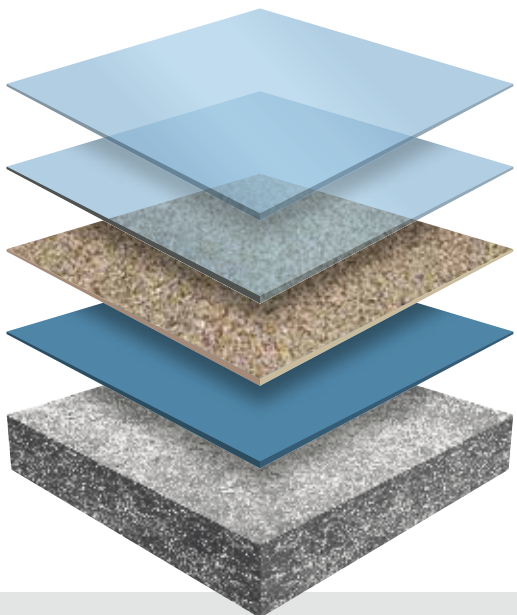

HOW IT'S MADE

PT300 - Tinted Topcoat (optional)

PT300 - Tinted Topcoat

Full Broadcast of Dry Sand

PB 200 - Polyurea Basecoat and primer (tinted)



ADVANTAGES

- > Pre-Tinted
- > UV Stable
- > Chemical Resistant
- > Flexible
- > Abrasion Resistant
- > Slip Resistant
- > Extreme Adhesion
- > Choice of Cure Rates
- > Long Open Times

TYPICAL APPLICATIONS

- > Shop Floors
- > Restrooms
- > Commercial Kitchens
- > Walk-In Freezers
- > Wash Down Areas
- > Showers
- > Locker Rooms
- > Pool Decks
- > Veterinary Clinics
- > High Traffic Areas

FAST INSTALLATION

MAIN 952-236-9305 OR 1-844-290-9364 >>> 21034 HERON WAY, SUITE 104, LAKEVILLE, MN 55044

© 2015 PENNTEK INDUSTRIAL COATINGS